

## SECTION 1: IDENTIFICATION

### 1.1. Product Identifier

**Product Form:** Mixture

**Product Name:** Cold Mix Asphalt, Cutback Asphalt

### 1.2. Recommended Use and Restrictions on Use

**Use Of The Substance/Mixture** : No use is specified

**Restrictions On Use** : No additional information available

### 1.3. Name, Address, and Telephone of the Responsible Party

#### Company

CalPortland Company  
 10655 W Park Run Drive  
 Suite 275  
 Las Vegas, NV 89144  
 T: 626-852-6200

Website: [www.calportland.com](http://www.calportland.com)

Email: [environmental@calportland.com](mailto:environmental@calportland.com)

### 1.4. Emergency Telephone Number

**Emergency Number** : 626-852-6200

## SECTION 2: HAZARDS IDENTIFICATION

### 2.1. Classification of the Substance or Mixture

#### GHS-US Classification

Carcinogenicity, Category 1A H350

Specific target organ toxicity – Single exposure, Category 3, Respiratory tract irritation H335

Specific target organ toxicity – Repeated exposure, Category 1 H372

### 2.2. Label Elements

#### GHS-US Labeling

##### Hazard Pictograms (GHS-US)



##### Signal Word (GHS-US)

: Danger

##### Hazard Statements (GHS-US)

: H335 - May cause respiratory irritation.  
 H350 - May cause cancer (Inhalation).  
 H372 - Causes damage to organs (lung/respiratory system) through prolonged or repeated exposure (Inhalation).

##### Precautionary Statements (GHS-US)

: P201 - Obtain special instructions before use.  
 P202 - Do not handle until all safety precautions have been read and understood.  
 P260 - Do not breathe dust, fume, vapors.  
 P264 - Wash hands, forearms and face thoroughly after handling.  
 P270 - Do not eat, drink or smoke when using this product.  
 P271 - Use only outdoors or in a well-ventilated area.  
 P280 - Wear eye protection, protective clothing, protective gloves.  
 P304+P340 - If inhaled: Remove person to fresh air and keep at rest in a position comfortable for breathing.  
 P308+P313 - If exposed or concerned: Get medical advice/attention.  
 P403+P233 - Store in a well-ventilated place. Keep container tightly closed.  
 P405 - Store locked up.  
 P501 - Dispose of contents and/or container to hazardous or special waste collection point, in accordance with local, regional, national and/or international regulations.

### 2.3. Hazards associated with known or reasonably anticipated uses

If this product is used in unforeseeable chemical processes and not used as intended or reasonable, the hazards listed in Section 2.3 cannot cover all chemistries. Therefore, a Process Hazard Analysis (PHA) or other hazard assessment for additional specific end uses should be performed to ensure that hazards are fully understood, and adequate safety measures are in place. See Section 10 for relevant reactivity and stability information.

# Cold Mix Asphalt, Cutback Asphalt

Safety Data Sheet

According to Federal Register / Vol. 89, No. 98 / Monday, May 20, 2024 / Rules and Regulations

## 2.4. Other Hazards

Exposure may aggravate pre-existing eye, skin, or respiratory conditions. May release small amounts of hydrogen sulfide. Hydrogen sulfide is a highly flammable, explosive gas under certain conditions, is a toxic gas, and may be fatal. Gas can accumulate in the headspace of closed containers, use caution when opening sealed containers. Heating the product or containers can cause thermal decomposition of the product and release hydrogen sulfide.

## 2.5. Unknown Acute Toxicity (GHS-US)

No data available

## SECTION 3: COMPOSITION/INFORMATION ON INGREDIENTS

### 3.1. Substance

Not applicable

### 3.2. Mixture

Name	Synonyms	Product Identifier	%	GHS US classification
Aggregate (crushed stone, sand and gravel)	-	(CAS-No.) Not assigned	90 – 95	Not classified.
Quartz	Quartz (SiO <sub>2</sub> ) / Silica, crystalline, quartz / Crystalline silica, quartz / .alpha.-Quartz / Silica, crystalline, .alpha.-quartz / Silica, .alpha.-quartz / Silicon dioxide / Silica, quartz / Silica, crystalline / Quartz (respirable fraction) / Quartz, silica	(CAS-No.) 14808-60-7	10 – 90	Carc. 1A, H350 STOT SE 3, H335 STOT RE 1, H372
Asphalt	Asphalt (petroleum) / Bitumen / Bituminous asphalt / Bitumens, asphalt / Asphalt (A very complex combination of high molecular weight organic compounds containing a relatively high proportion of hydrocarbons having carbon numbers predominantly greater than C <sub>25</sub> with high carbon-to-hydrogen ratios. It also contains small amounts of various metals such as nickel, iron, or vanadium. It is obtained as the non-volatile residue from distillation of crude oil or by separation as the raffinate from a residual oil in a deasphalting or decarbonization process.)	(CAS-No.) 8052-42-4	5 – 10	Carc. 2, H351

This mixture has a variable composition. Full text of H-phrases: see section 16.

## SECTION 4: FIRST AID MEASURES

### 4.1. Description of First-aid Measures

**First-aid Measures General:** Never give anything by mouth to an unconscious person. If you feel unwell, seek medical advice (show the label where possible).

**First-aid Measures After Inhalation:** When symptoms occur: go into open air and ventilate suspected area. Encourage exposed person to cough, spit out, and blow nose to remove dust. Obtain medical attention if breathing difficulty persists.

**First-aid Measures After Skin Contact:** Remove contaminated clothing. Wash immediately with plenty of soap and water. If exposed or concerned: Get medical advice/attention.

**First-aid Measures After Eye Contact:** Rinse cautiously with water for at least 15 minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Obtain medical attention if irritation develops or persists.

**First-aid Measures After Ingestion:** Rinse mouth. Do NOT induce vomiting. Obtain medical attention.

### 4.2. Most Important Symptoms and Effects Both Acute and Delayed

**Symptoms/Injuries:** May cause respiratory irritation. Causes damage to organs (lung/respiratory system) through prolonged or repeated exposure (inhalation). May cause cancer by inhalation.

**Symptoms/Injuries After Inhalation:** Irritation of the respiratory tract and the other mucous membranes. Toxic fumes may be generated from heating asphalt and may be harmful if inhaled. For particulates and dust: Cough, dyspnea (breathing difficulty), wheezing; decreased pulmonary function, progressive respiratory symptoms (silicosis). The lungs become very inflamed and may fill with fluid, causing severe shortness of breath and low blood oxygen levels. Inflammation, scarring, and symptoms progress faster in accelerated silicosis than in simple silicosis. Progressive massive fibrosis may occur in simple or accelerated silicosis, but is more common in the accelerated form. Progressive massive fibrosis results from severe scarring and leads to the destruction of normal lung structures.

**Symptoms/Injuries After Skin Contact:** Prolonged exposure may cause skin irritation.

**Symptoms/Injuries After Eye Contact:** Eye contact with dust may cause mechanical irritation.

**Symptoms/Injuries After Ingestion:** Ingestion may cause adverse effects.

# Cold Mix Asphalt, Cutback Asphalt

## Safety Data Sheet

According to Federal Register / Vol. 89, No. 98 / Monday, May 20, 2024 / Rules and Regulations

**Chronic Symptoms:** According to the International Agency for Research on Cancer (IARC), exposure to oxidized asphalt is probably carcinogenic to humans. For particulates and dust: This product contains crystalline silica. Long term exposure to respirable crystalline silica results in a significant risk of developing silicosis; a seriously disabling and fatal lung disease, and other non-malignant respiratory disease, lung cancer, kidney effects, and immune system effects. Pulmonary function may be reduced and pre-existing lung diseases such as emphysema or asthma may be aggravated by inhalation exposure to dusts. Smoking aggravates the effects of exposure.

### 4.3. Indication of Any Immediate Medical Attention and Special Treatment Needed

If exposed or concerned, get medical advice and attention. If medical advice is needed, have product container or label at hand. Treatment will be based on severity and prognosis of disease.

## SECTION 5: FIRE-FIGHTING MEASURES

### 5.1. Extinguishing Media

**Suitable Extinguishing Media:** Water spray, fog, carbon dioxide (CO<sub>2</sub>), alcohol-resistant foam, or dry chemical.

**Unsuitable Extinguishing Media:** Do not use a heavy water stream. Use of heavy stream of water may spread fire.

### 5.2. Special Hazards Arising From the Substance or Mixture

**Fire Hazard:** Not considered flammable but may burn at high temperatures.

**Explosion Hazard:** Product is not explosive. At elevated temperatures, explosive vapor/air mixtures may form. Product may release explosive hydrogen sulfide gas.

**Reactivity:** Hazardous reactions will not occur under normal conditions. Silicates dissolve in hydrofluoric acid, producing corrosive silicon tetrafluoride gas. Silicates react with powerful oxidizers such as fluorine, boron trifluoride, chlorine trifluoride, manganese trifluoride, and oxygen difluoride.

### 5.3. Advice for Firefighters

**Precautionary Measures Fire:** Exercise caution when fighting any chemical fire.

**Firefighting Instructions:** Use water spray or fog for cooling exposed containers.

**Protection During Firefighting:** Do not enter fire area without proper protective equipment, including respiratory protection.

**Hazardous Combustion Products:** Carbon oxides (CO, CO<sub>2</sub>). Nitrogen oxides. Sulphur oxides.

## SECTION 6: ACCIDENTAL RELEASE MEASURES

### 6.1. Personal Precautions, Protective Equipment and Emergency Procedures

**General Measures:** Do not handle until all safety precautions have been read and understood. Do not get in eyes, on skin, or on clothing. Do not breathe dust or fumes.

#### 6.1.1. For Non-Emergency Personnel

**Protective Equipment:** Use appropriate personal protective equipment (PPE).

**Emergency Procedures:** Evacuate unnecessary personnel.

#### 6.1.2. For Emergency Personnel

**Protective Equipment:** Equip cleanup crew with proper protection.

**Emergency Procedures:** Ventilate area. Upon arrival at the scene, a first responder is expected to recognize the presence of dangerous goods, protect oneself and the public, secure the area, and call for the assistance of trained personnel as soon as conditions permit.

### 6.2. Environmental Precautions

Prevent entry to sewers and public waters.

### 6.3. Methods and Materials for Containment and Cleaning Up

**For Containment:** Contain solid spills with appropriate barriers and prevent migration and entry into sewers or streams.

**Methods for Cleaning Up:** Allow liquid material to solidify before cleaning up. Clean up spills immediately and dispose of waste safely. Recover the product by vacuuming, shoveling or sweeping. Avoid generation of dust during clean-up of spills. Transfer spilled material to a suitable container for disposal. Contact competent authorities after a spill.

### 6.4. Reference to Other Sections

See Section 8 for exposure controls and personal protection and Section 13 for disposal considerations.

## SECTION 7: HANDLING AND STORAGE

### 7.1. Precautions for Safe Handling

**Additional Hazards When Processed:** Hydrogen sulfide is a highly flammable, explosive gas under certain conditions, is a toxic gas, and may be fatal. Gas can accumulate in the headspace of closed containers, use caution when opening sealed containers. Heating the product or containers can cause thermal decomposition of the product and release hydrogen sulfide. Cutting, crushing or grinding crystalline silica-bearing materials may release respirable crystalline silica, a known carcinogen. Use all appropriate measures of dust control or suppression and personal protective equipment.

# Cold Mix Asphalt, Cutback Asphalt

Safety Data Sheet

According to Federal Register / Vol. 89, No. 98 / Monday, May 20, 2024 / Rules and Regulations

**Precautions for Safe Handling:** Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Avoid creating or spreading dust. Do not breathe dust or fumes. Avoid contact with eyes, skin and clothing. Wash hands and other exposed areas with mild soap and water before eating, drinking or smoking and when leaving work.

**Hygiene Measures:** Handle in accordance with good industrial hygiene and safety procedures.

## 7.2. Conditions for Safe Storage, Including Any Incompatibilities

**Technical Measures:** Comply with applicable regulations.

**Storage Conditions:** Keep container closed when not in use. Store in a dry, cool place. Keep/Store away from direct sunlight, extremely high or low temperatures and incompatible materials. Store locked up/in a secure area.

**Incompatible Materials:** Strong acids, strong bases, strong oxidizers.

## 7.3. Specific End Use(s)

No use is specified

## SECTION 8: EXPOSURE CONTROLS/PERSONAL PROTECTION

### 8.1. Control Parameters

For substances listed in section 3 that are not listed here, there are no established exposure limits from the manufacturer, supplier, importer, or the appropriate advisory agency including: ACGIH (TLV), AIHA (WEEL), NIOSH (REL), or OSHA (PEL).

Asphalt (8052-42-4)		
USA ACGIH	ACGIH® TLV® TWA	0.5 mg/m <sup>3</sup> (fume, inhalable particulate matter)
USA ACGIH	ACGIH® chemical category	Not Classifiable as a Human Carcinogen fume, coal tar-free
USA ACGIH	BEI	2.5 µg/l Parameter: 1-Hydroxypyrene with hydrolysis - Medium: urine - Sampling time: end of shift at end of workweek (background)
USA NIOSH	NIOSH REL C	5 mg/m <sup>3</sup> (fume)
Quartz (14808-60-7)		
USA ACGIH	ACGIH® TLV® TWA	0.025 mg/m <sup>3</sup> (respirable particulate matter)
USA ACGIH	ACGIH® chemical category	Suspected Human Carcinogen
USA NIOSH	NIOSH REL TWA	0.05 mg/m <sup>3</sup> (respirable dust)
USA IDLH	IDLH	50 mg/m <sup>3</sup> (respirable dust)
USA OSHA	OSHA PEL TWA	50 µg/m <sup>3</sup> (Respirable crystalline silica)
USA OSHA	OSHA PEL TWA	(250)/(%SiO <sub>2</sub> +5) mppcf TWA (respirable fraction) (10)/(%SiO <sub>2</sub> +2) mg/m <sup>3</sup> TWA (respirable fraction) (For any operations or sectors for which the respirable crystalline silica standard, 1910.1053, is stayed or otherwise not in effect, See 20 CFR 1910.1000 TABLE Z-3)


### 8.2. Exposure Controls

#### Appropriate Engineering Controls

: Ensure adequate ventilation, especially in confined areas. Ensure all national/local regulations are observed. Gas detectors should be used when toxic gases may be released. Gas detectors should be used when flammable gases or vapors may be released. Suitable eye/body wash equipment should be available in the vicinity of any potential exposure. Maintain sufficient mechanical or natural ventilation to assure silica concentrations remain below PEL/TLV. Use local exhaust if necessary. Power equipment should be equipped with properly designed dust collection devices. If product needs to be altered, use wet processing techniques if possible to minimize generation of dust.

#### Personal Protective Equipment

: Gloves. Protective clothing. Protective goggles. Insufficient ventilation: wear respiratory protection.

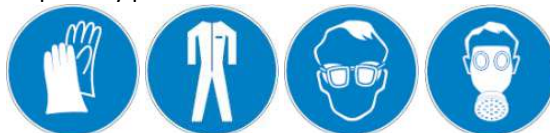

#### Materials for Protective Clothing

##### Hand Protection

: Chemically resistant materials and fabrics.

##### Eye and Face Protection

: Wear protective gloves.

##### Skin and Body Protection

: Chemical safety goggles.

##### Respiratory Protection

: Wear suitable protective clothing.

: If exposure limits are exceeded or irritation is experienced, approved respiratory protection should be worn. In case of inadequate ventilation, oxygen deficient atmosphere, or where exposure levels are not known wear approved respiratory protection.

#### Other Information

: When using, do not eat, drink or smoke.

# Cold Mix Asphalt, Cutback Asphalt

Safety Data Sheet

According to Federal Register / Vol. 89, No. 98 / Monday, May 20, 2024 / Rules and Regulations

## SECTION 9: PHYSICAL AND CHEMICAL PROPERTIES

### 9.1. Information on Basic Physical and Chemical Properties

Physical State	: Solid
Color	: Coarse, black
Odor	: Petroleum
pH	: No data available
Melting Point	: No data available
Freezing Point	: No data available
Boiling Point	: > 350 °C (662 °F)
Flash Point	: > 260 °F (127 °C)
Auto-ignition Temperature	: No data available
Decomposition Temperature	: No data available
Flammability (solid, gas)	: No data available
Vapor Pressure	: No data available
Relative Vapor Density at 20 °C	: No data available
Relative Density	: No data available
Specific Gravity	: 2.2 - 2.5
Solubility	: No data available
Partition Coefficient: N-Octanol/Water	: No data available
Viscosity, Kinematic	: No data available
Particle Size	: No data available
Particle Size Distribution	: No data available
Particle Shape	: No data available
Particle Aspect Ratio	: No data available
Particle Aggregation State	: No data available
Particle Agglomeration State	: No data available
Particle Specific Surface Area	: No data available
Particle Dustiness	: No data available

### 9.2. Other Information

No additional information available

## SECTION 10: STABILITY AND REACTIVITY

### 10.1. Reactivity

Hazardous reactions will not occur under normal conditions. Silicates dissolve in hydrofluoric acid, producing corrosive silicon tetrafluoride gas. Silicates react with powerful oxidizers such as fluorine, boron trifluoride, chlorine trifluoride, manganese trifluoride, and oxygen difluoride.

### 10.2. Chemical Stability

Stable under recommended handling and storage conditions (see section 7).

### 10.3. Possibility of Hazardous Reactions, Including those Associated with Foreseeable Emergencies

Hazardous polymerization will not occur.

### 10.4. Conditions to Avoid

Avoid creating or spreading dust. Direct sunlight, extremely high or low temperatures, and incompatible materials.

### 10.5. Incompatible Materials

Strong acids, strong bases, strong oxidizers.

### 10.6. Hazardous Decomposition Products

Crystalline silica exists in several forms, the most common of which is quartz. If crystalline silica (quartz) is heated to more than 870 °C (1598 °F), it can change to a form of crystalline silica known as tridymite, and if crystalline silica (quartz) is heated to more than 1470 °C (2678 °F), it can change to a form of crystalline silica known as cristobalite. The OSHA PEL for crystalline silica as tridymite and cristobalite is one-half of the OSHA PEL for crystalline silica (quartz). Carbon oxides (CO, CO<sub>2</sub>). Thermal decomposition may produce: Hydrogen sulfide. Sulfur oxides. Nitrogen oxides.

## SECTION 11: TOXICOLOGICAL INFORMATION

### 11.1. Information on Toxicological Effects

**Likely Routes of Exposure:** Dermal, Ingestion, Inhalation, Eye contact

**Acute Toxicity (Oral):** Not classified.

**Acute Toxicity (Dermal):** Not classified.

**Acute Toxicity (Inhalation):** Not classified.

Asphalt (8052-42-4)

# Cold Mix Asphalt, Cutback Asphalt

Safety Data Sheet

According to Federal Register / Vol. 89, No. 98 / Monday, May 20, 2024 / Rules and Regulations

LD50 Oral Rat	> 5000 mg/kg (Source: ECHA)
LD50 Dermal Rabbit	> 2000 mg/kg (Source: ECHA)
LC50 Inhalation Rat	> 94.4 mg/m <sup>3</sup> (no deaths)
<b>Quartz (14808-60-7)</b>	
LD50 Oral Rat	> 5000 mg/kg
LD50 Dermal Rat	> 5000 mg/kg

**Skin Corrosion/Irritation:** Not classified.

**Serious Eye Damage/Irritation:** Not classified.

**Respiratory or Skin Sensitization:** Not classified.

**Germ Cell Mutagenicity:** Not classified.

**Carcinogenicity:** May cause cancer (inhalation).

<b>Asphalt (8052-42-4)</b>	
IARC group	2A, 2B
OSHA Hazard Communication Carcinogen List	In OSHA Hazard Communication Carcinogen list.
<b>Quartz (14808-60-7)</b>	
IARC group	1
National Toxicology Program (NTP) Status	Known Human Carcinogens.
OSHA Hazard Communication Carcinogen List	In OSHA Hazard Communication Carcinogen list.

**Reproductive Toxicity:** Not classified.

**Specific Target Organ Toxicity (Single Exposure):** May cause respiratory irritation.

**Specific Target Organ Toxicity (Repeated Exposure):** Causes damage to organs (lung/respiratory system) through prolonged or repeated exposure (inhalation).

**Aspiration Hazard:** Not classified.

**Symptoms/Injuries After Inhalation:** Irritation of the respiratory tract and the other mucous membranes. Toxic fumes may be generated from heating asphalt and may be harmful if inhaled. For particulates and dust: Cough, dyspnea (breathing difficulty), wheezing; decreased pulmonary function, progressive respiratory symptoms (silicosis). The lungs become very inflamed and may fill with fluid, causing severe shortness of breath and low blood oxygen levels. Inflammation, scarring, and symptoms progress faster in accelerated silicosis than in simple silicosis. Progressive massive fibrosis may occur in simple or accelerated silicosis, but is more common in the accelerated form. Progressive massive fibrosis results from severe scarring and leads to the destruction of normal lung structures.

**Symptoms/Injuries After Skin Contact:** Prolonged exposure may cause skin irritation.

**Symptoms/Injuries After Eye Contact:** Eye contact with dust may cause mechanical irritation.

**Symptoms/Injuries After Ingestion:** Ingestion may cause adverse effects.

**Chronic Symptoms:** According to the International Agency for Research on Cancer (IARC), exposure to oxidized asphalt is probably carcinogenic to humans. For particulates and dust: This product contains crystalline silica. Long term exposure to respirable crystalline silica results in a significant risk of developing silicosis; a seriously disabling and fatal lung disease, and other non-malignant respiratory disease, lung cancer, kidney effects, and immune system effects. Pulmonary function may be reduced and pre-existing lung diseases such as emphysema or asthma may be aggravated by inhalation exposure to dusts. Smoking aggravates the effects of exposure.

## SECTION 12: ECOLOGICAL INFORMATION

### 12.1. Toxicity

Ecology - General : Not classified.

### 12.2. Persistence and Degradability

<b>Cold Mix Asphalt, Cutback Asphalt</b>	
Persistence and Degradability	Not established.

### 12.3. Bioaccumulative Potential

<b>Cold Mix Asphalt, Cutback Asphalt</b>	
Bioaccumulative Potential	Not established.

<b>Asphalt (8052-42-4)</b>	
BCF Fish	No bioaccumulation expected.
Partition coefficient n-octanol/water (Log Pow)	> 6

# Cold Mix Asphalt, Cutback Asphalt

Safety Data Sheet

According to Federal Register / Vol. 89, No. 98 / Monday, May 20, 2024 / Rules and Regulations

## 12.4. Mobility in Soil

No additional information available

## 12.5. Other Adverse Effects

**Other Information** : Avoid unintended release to the environment.

## SECTION 13: DISPOSAL CONSIDERATIONS

### 13.1. Waste Treatment Methods

**Waste Disposal Recommendations:** Dispose of contents/container in accordance with local, regional, national, and international regulations.

**Additional Information:** Container may remain hazardous when empty. Continue to observe all precautions.

**Ecology - Waste Materials:** Avoid unintended release to the environment.

## SECTION 14: TRANSPORT INFORMATION

The shipping description(s) stated herein were prepared in accordance with certain assumptions at the time the SDS was authored, and can vary based on a number of variables that may or may not have been known at the time the SDS was issued.

### 14.1. In Accordance with DOT

Not regulated for transport

### 14.2. In Accordance with IMDG

Not regulated for transport

### 14.3. In Accordance with IATA

Not regulated for transport

## SECTION 15: REGULATORY INFORMATION

### 15.1. US Federal Regulations

**Cold Mix Asphalt, Cutback Asphalt**

<b>SARA Section 311/312 Hazard Classes</b>	Health hazard - Carcinogenicity Health hazard - Specific target organ toxicity (single or repeated exposure)
--	---

**Asphalt (8052-42-4)**

Listed on the United States TSCA (Toxic Substances Control Act) inventory - Status: Active

**Quartz (14808-60-7)**

Listed on the United States TSCA (Toxic Substances Control Act) inventory - Status: Active

### 15.2. US State Regulations

**Asphalt (8052-42-4)**

U.S. - New Jersey - Right to Know Hazardous Substance List

U.S. - Pennsylvania - RTK (Right to Know) List


U.S. - Massachusetts - Right To Know List

**Quartz (14808-60-7)**

U.S. - New Jersey - Right to Know Hazardous Substance List

U.S. - Pennsylvania - RTK (Right to Know) List

U.S. - Massachusetts - Right To Know List

 **WARNING:** This product can expose you to chemicals including Silica, crystalline (airborne particles of respirable size), a chemical known to the State of California to cause cancer. For more information, go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

## SECTION 16: OTHER INFORMATION, INCLUDING DATE OF PREPARATION OR LAST REVISION

**Date of Preparation or Latest Revision** : 12/17/2025

**Other Information** : This document has been prepared in accordance with the SDS requirements of the OSHA Hazard Communication Standard 29 CFR 1910.1200

### GHS Full Text Phrases:

H335	May cause respiratory irritation
H350	May cause cancer.
H351	Suspected of causing cancer.
H372	Causes damage to organs through prolonged or repeated exposure

### Glossary of Data Source Abbreviations

ATSDR: Agency for Toxic Substances and Disease Registry (U.S. Department of Health and Human Services)

AU\_WES: Australia WES

CHEMVIEW: ChemView (U.S. Environmental Protection Agency)

EC\_RAR: European Commission Renewal Assessment Report

EC\_SCOEL: European Commission Scientific Committee on Occupational

FOOD\_JOURN: Food Research Journal (1956)

IARC: The International Agency for Research on Cancer

IDLH: National Institute for Occupational Health and Safety Immediately Dangerous to Life or Health Value Profiles

IUCLID: International Uniform Chemical Information Database

JAPAN\_GHS: Japan GHS Basis for Classification Data

# Cold Mix Asphalt, Cutback Asphalt

## Safety Data Sheet

According to Federal Register / Vol. 89, No. 98 / Monday, May 20, 2024 / Rules and Regulations

---

### Exposure Limits

ECETOC: European Centre for Ecotoxicology and Toxicology of Chemicals

### Reports

ECHA\_API: European Chemicals Agency API

ECHA\_RAC: ECHA Committee for Risk Assessment

EFSA: European Food Safety Authority

EPA: U.S. Environmental Protection Agency

EPA\_AEGL: Acute Exposure Guideline Levels (U.S. Environmental Protection Agency)

EPA\_FIFRA: Federal Insecticide, Fungicide, and Rodenticide Act Reregistration Eligibility Decision (U.S. Environmental Protection Agency)

EPA\_HPVC: High Production Volume Chemicals (U.S. Environmental Protection Agency)

EPA\_TRED: Risk Assessment for Tolerance Reassessment Eligibility Decision (U.S. Environmental Protection Agency)

EU\_CLH: European Union Harmonised Classification and Labelling Proposal

EU\_RAR: European Union Risk Assessment Report

JP\_J-CHECK: Japan J-Check

KR\_NIER: South Korea National Institute of Environmental Research Evaluations

NICNAS: Australia National Industrial Chemicals Notification and Assessment Scheme

NIOSH: National Institute for Occupational Health and Safety (U.S. Department of Health and Human Services)

NLM\_CIP: National Library of Medicine ChemID plus database

NLM\_HSDB: National Library of Medicine Hazardous Substance Data Bank

NLM\_PUBMED: National Library of Medicine PubMed database

NTP: National Toxicology Program

NZ\_CCID: New Zealand Chemical Classification and Information Database

OECD\_EHSP: Environment, Health, and Safety Publication (Organisation for Economic Co-operation and Development)

OECD\_SIDS: Screening Information Data Sets (Organisation for Economic Co-operation and Development)

WHO: World Health Organization

*This information is based on our current knowledge and is intended to describe the product for the purposes of health, safety and environmental requirements only. It should not therefore be construed as guaranteeing any specific property of the product.*

SDS US (GHS HazCom)